


为 您 的 产 品 保 驾 护 航

PRODUCT DATASHEET

CERAMIC TUBE FUSE


**JFC5T CERAMIC TUBE FUSE**

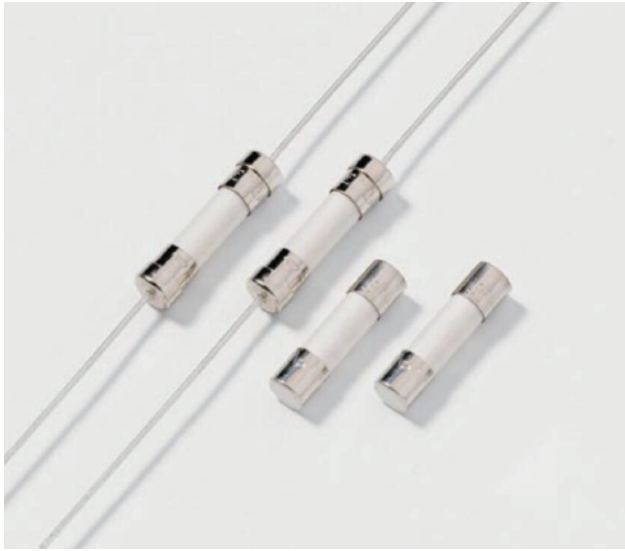


### Description

JFC5T Time-lag ceramic tube fuse, suitable for various kinds of electronic devices' circuit over current protection. Widely used in industrial of Lighting, Power supply and Adapter applications, etc.

### Agency Approvals

Agency	File Number
	E486200

### Dimensions and Structure(mm.)

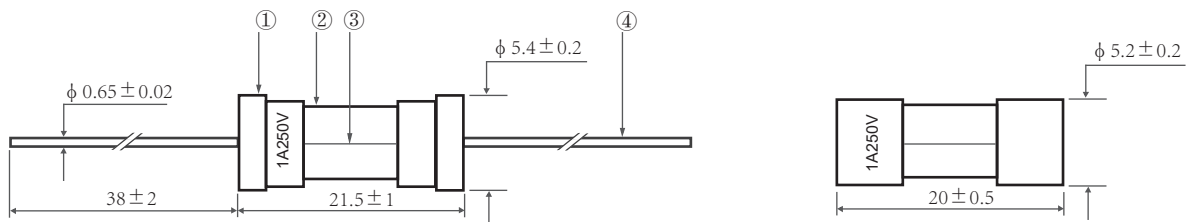

NO.	Part Name	Material
①	Cap	Nickel Plated Brass
②	Body	Ceramic Tube
③	Fuse element	Alloy
④	Lead	Nickel Plated Brass

### Operating Characteristics

% of Ampere Rating(In)	Blowing Time
100%*In	4 hours Min
135%*In	1 hours Max
200%*In	120 sec Max

**Performance Specification**

Model	Ampere Rating (A)	Voltage Rating (V)	Breaking Capacity	I <sup>2</sup> T Melting Integral(A <sup>2</sup> .S)
JFC5T0100N/L	0.10	250V/125V	10000A@125V AC 35A@250V AC	0.002
JFC5T0125N/L	0.125			0.003
JFC5T0160N/L	0.16			0.005
JFC5T0200N/L	0.20			0.01
JFC5T0250N/L	0.25			0.02
JFC5T0300N/L	0.30			0.04
JFC5T0315N/L	0.315			0.045
JFC5T0350N/L	0.35			0.055
JFC5T0400N/L	0.40			0.07
JFC5T0500N/L	0.50			0.1
JFC5T0630N/L	0.63			0.2
JFC5T0750N/L	0.75			0.35
JFC5T0800N/L	0.80			0.45
JFC5T1100N/L	1.00			0.9
JFC5T1125N/L	1.25		10000A@125V AC 100A@250V AC	1.3
JFC5T1150N/L	1.50			1.6
JFC5T1160N/L	1.60			2.5
JFC5T1200N/L	2.00			5.8
JFC5T1250N/L	2.50			7.6
JFC5T1300N/L	3.00			8.1
JFC5T1315N/L	3.15			11
JFC5T1350N/L	3.50			19
JFC5T1400N/L	4.00			28
JFC5T1500N/L	5.00			40
JFC5T1600N/L	6.00		10000A@125V AC 200A@250V AC	50
JFC5T1630N/L	6.30			64
JFC5T1700N/L	7.00			107
JFC5T1800N/L	8.00			133
JFC5T2100N/L	10.0			242
JFC5T2125N/L	12.5			295
JFC5T2150N/L	15.0			368
JFC5T2160N/L	16.0			384
JFC5T2200N/L	20.0			442
JFC5T2250N/L	25.0			568
JFC5T2300N/L	30.0			715

### Product Characteristics

Item		Contain
Lead Pull Strength		5N for 10±1 Seconds
Lead Thrust Strength		2N for 10±1 Seconds
Solder ability	Wave	260°C, ≤3s;
	Soldering Iron	350±10°C, ≤3s
Soldering Heat Resistance	Wave	260°C, 10s
	Soldering Iron	350°C, 5s.


### Electrical Characteristics

Test Condition	All electrical test is to be conducted with the ambient air at a temperature of 25±5°C.
Load capacity	When the fuse loads through 100% of rated current, should blow within 4 hours.
Rising Temperature Test	When the 100% times of Ampere Rating passes the fuse, after reaching thermal balance , the temperature on the fuse surface rising shall not be higher than 75°C. Note: Rising temperature = the Surface temperature - Ambient temperature.


### Environmental Characteristic

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from 20~30°C, engineer should consider the environmental temperature's affection to fuses. Please refer: Temperature Rerating Curve:

**Temperature Rerating Curve**

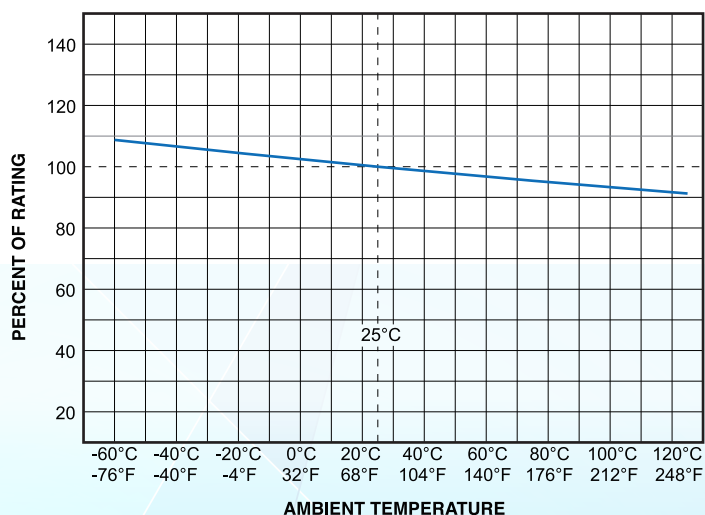

**Average Time-Current Curve**

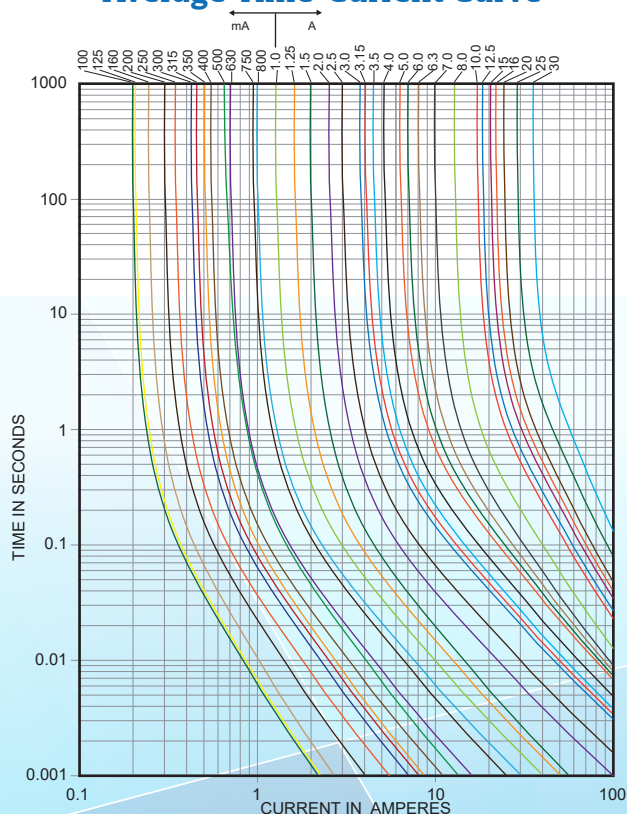


<b>Operating Temperature</b>	-55℃ ~ +125℃
<b>Stock Condition</b>	Humidity: Relative humidity ≤ 75% store 3 years in average


### Installation Recommendations

Propose installation way as following picture:

A.Horizontal installation

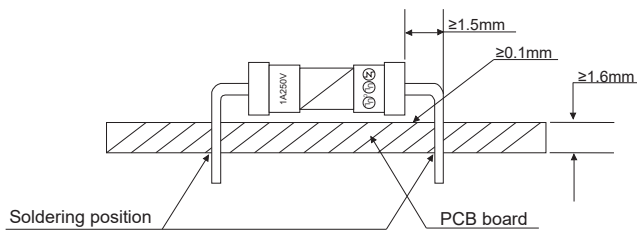

B.Vertical installation

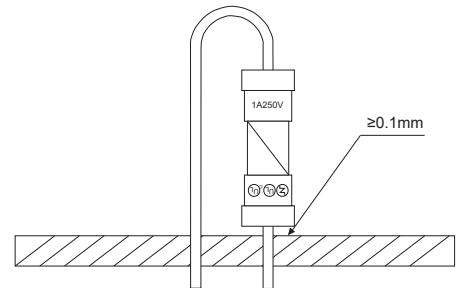


Recommended Soldering Parameters :

Recommended Soldering Parameters	
Wave Parameters	Solder Pot Temperature: 260℃ Max
	Solder Dwell Time 2~5s
Hand-Solder Parameters	Solder Iron Temperature: 350±5℃
	Heating Time: 5s Max

### Part Number System

**JF C 5T XXXX N/L**

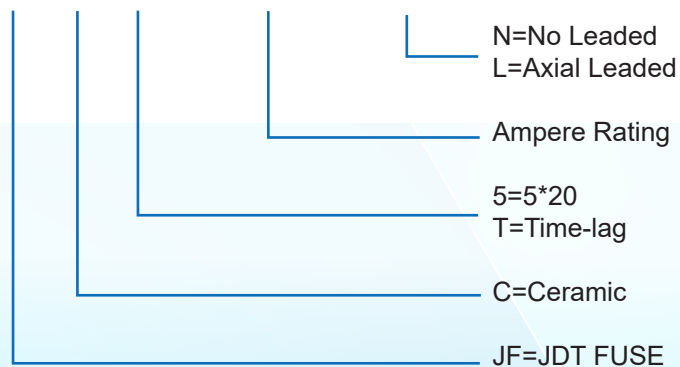

### Packaging

Shape	Packaging & Quantity
No Ledged	500 pcs/poly bag
Axial Ledged	200 pcs/poly bag